www.rockwaterce.com



HYDRAULIC QUICK COUPLER

ROCKWATER RQ-SERIES

ROCKWATER
CONSTRUCTION EQUIPMENT

QUICK COUPLER


Product Features


- Hydraulically operated.
- Primary hook actuated by hydraulic cylinder.
- Safety lock retains the attachment in case of misconnection.
- Equipped with locking system in case of misconnection or equipment failure.
- Variable pin center design for easy pick up and swap of wide range of attachments.
- Simple design for ease of maintenance and excellence in durability.







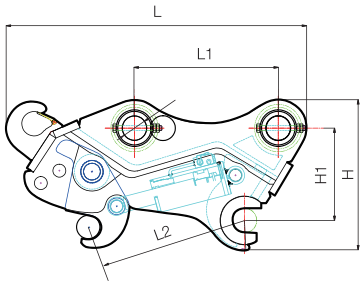





Model	Unit	RQ30	RQ40	RQ45	RQ50	RQ60	RQ80	RQ120	RQ130	RQ150
Weight	lb	88-110	120-155	309	265-375	462-485	728-750	903-936	1,124-1,164	1,477-1,962
Height (H)	inch	9-11	11-12	15	15-16	16-17	17-19	20-21	22	22-24
Height (H1)	inch	6.3-6.7	6.9-7.1	7.5-7.9	8.4-9.1	9.2-9.7	9.7-11.3	11.9-12.9	12.1-13.2	13.3-14.2
Width (W)	inch	8-9	10-11	17	16-17	17-18	17-20	21-22	23-24	24-26
Width (W1)	inch	3.9-5.9	5.9-7.1	7.4-8.6	9.9-11	11-12	12-13.4	14.5-18	14.8-18.6	15.2-17.3
Length (L)	inch	13-19	31-36	31	30-31	31-34	31-36	37-39	40-41	38-45
Length (L1)	inch	3.5-11.2	9.5-11.8	11.8-16.1	14.9-18.1	15.5-16.5	16.1-19.1	17.7-22	18.9-23.6	20.5-23.2
Length (L2)	inch	3.5-11.2	9.5-11.8	11.8-16.1	14.9-18.1	15.5-16.5	16.1-19.1	17.7-22	18.9-23.6	20.5-23.2
Working Pressure	psi	580-4,641	580-4,641	580-4,641	580-4,641	580-5,076	580-5,076	580-5,076	580-5,076	580-5,076
Oil Flow	gpm	2.6-5.3	2.6-5.3	2.6-5.3	2.6-5.3	3-7	2.6-8	2.6-8	2.6-8	2.6-8
Pin Diameter (DØ)	mm	25-45	45-50	50-60	50-70	60-65	70-80	75-90	80-120	90-120
Applicable Carrier	ton	1-2	3-6	8-10	7-15	15-17	18-24	25-30	26-32	34-50

*Specification and features are subject to change without prior notice for improvement in quality.
*Above pin diameter is a range of pins which a certain model can be fabricated to grab.

ROCKWATER
CONSTRUCTION EQUIPMENT

Address : 1191 N. Patt St., Anaheim, CA 92801
Phone : (714) 879-5919 **Fax :** (714) 879-9149
E-mail : sales@rockwaterce.com
www.rockwaterce.com

For sales and service, contact your Rockwater/ CB Dealer: